

Power divider/Combiner 3 Way SMA 50Ω 2 to 8GHz

工作频率 Frequency Range: 2-8GHz

插入损耗 Insertion Loss: $\leq 1.1\text{dB}$

驻波 VSWR: $\leq 1.40 : 1$

隔离 Isolation: $\geq 18\text{dB}$

幅度平衡 Amplitude Balance: $\leq \pm 0.9\text{dB}$

相位平衡 Phase Balance: $\leq \pm 8^\circ$

耐功率 Power Handling: 30 Watt

阻抗 Impedance: 50 OHMS

温度范围Temperature Range: -55° C - +85° C

接口Connectors: SMA-Female


相对湿度Relative Humidity: 0 ~ 90%

Unit: mm



2 May 2017 04:21:08


CH1 SWR 100 m / REF 1
S11 2 : 1. 0533 8. 000 000 000 GHz

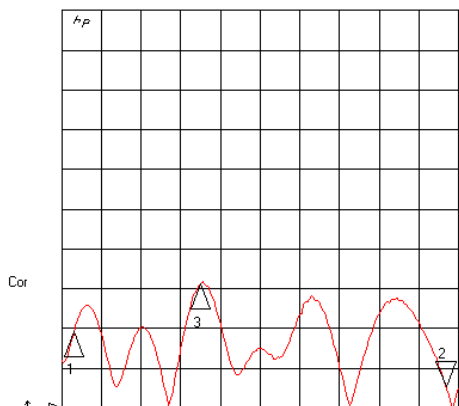

CH1 Markers
1 : 1. 1935
2. 00000 GHz
3 : 1. 3134
4. 04607 GHz

START 1800 . 000 MHz STOP 8200 . 000 MHz


CH3 LOG .9 dB/ REF 0 dB
S12/M 2 : . 00000 dB 8. 000 000 000 GHz

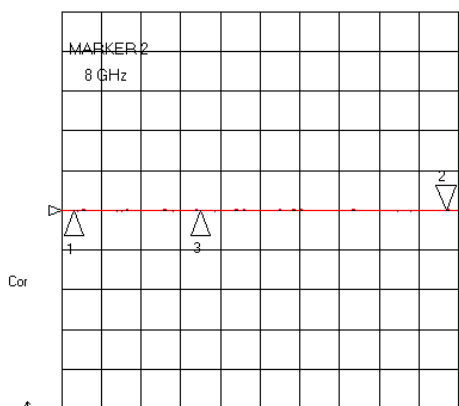

CH3 Markers
1 : . 00600 dB
2. 00000 GHz
3 : . 00700 dB
4. 04607 GHz

START 1800 . 000 MHz STOP 8200 . 000 MHz


CH2 LOG 1.1 dB/ REF -4.8 dB
S21 2 : -5 . 4390 dB 8. 000 000 000 GHz

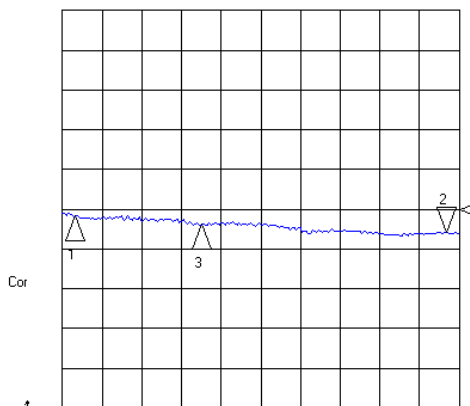

CH2 Markers
1 : -4 . 9690 dB
2. 00000 GHz
3 : -5 . 2140 dB
4. 04607 GHz

START 1800 . 000 MHz STOP 8200 . 000 MHz

CH4 SWR 100 m / REF 1
S22 2 : 1. 0632 8. 000 000 000 GHz

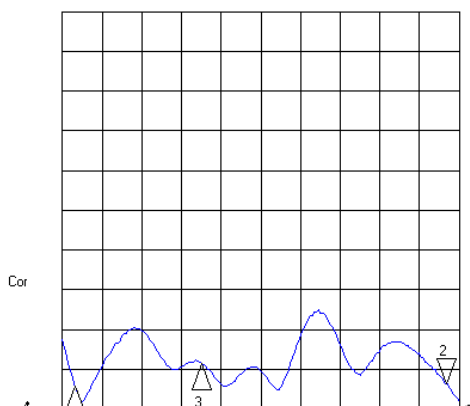

CH4 Markers
1 : 1. 0596
2. 00000 GHz
3 : 1. 1148
4. 04607 GHz

START 1800 . 000 MHz STOP 8200 . 000 MHz