

Part No.: RS3W0351850-N

Power divider/Combiner 3 Way N 50Ω 350 to 1850MHz

电气特性 Electrical:

工作频率 Frequency Range: 350-1850MHz

插入损耗 Insertion Loss: $\leq 0.5\text{dB}$

驻波 VSWR: $\leq 1.25 : 1$

耐功率 Power Handling: 200 Watt

阻抗 Impedance: 50 OHMS

机械特性 Mechanical:


温度范围 Temperature Range: $-30^{\circ}\text{C} - +70^{\circ}\text{C}$

接口 Connectors: N-Female

相对湿度 Relative Humidity: 0 ~ 90%


外形尺寸 Outline Drawing:

Unit: mm

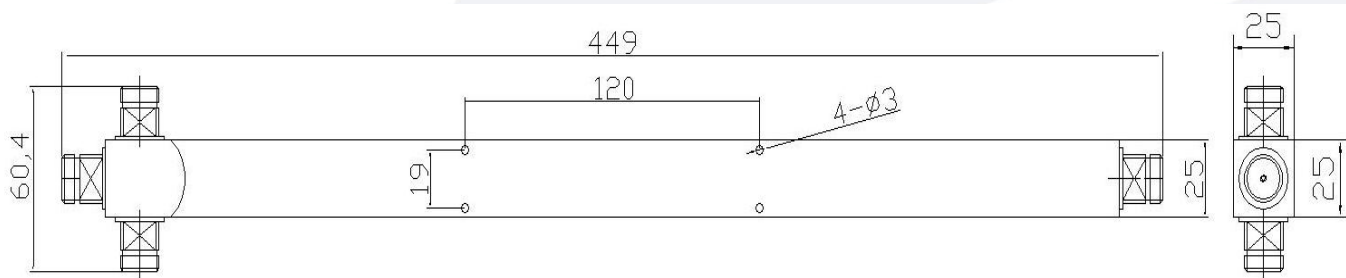

1 Nov 2019 09:38:25


CH1 SWR 100 m / REF 1
S11 2 : 1. 1732 1. 850 000 000 GHz

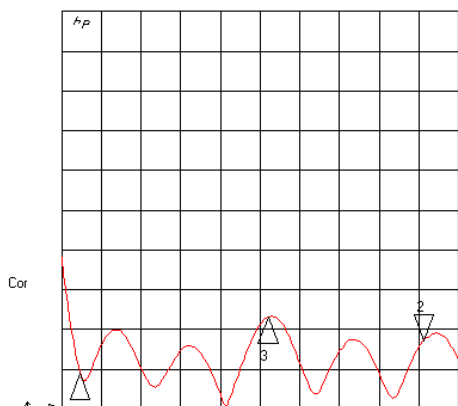

CH1 Markers
1 : 1. 0898
380 . 000 MHz
3 : 1. 2303
1. 18513 GHz

START 300 . 000 MHz STOP 2000 . 000 MHz


CH3 LOG .5 dB / REF 0 dB
S12/M 2 : - . 00500 dB 1. 850 000 000 GHz

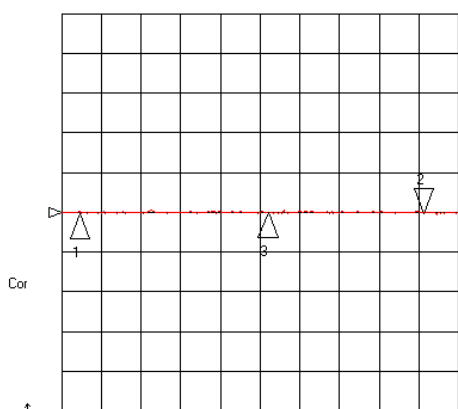

CH3 Markers
1 : . 01500 dB
380 . 000 MHz
3 : . 00000 dB
1. 18513 GHz

START 300 . 000 MHz STOP 2000 . 000 MHz
2002-1-1 00:13:42


CH2 LOG .5 dB / REF -4.8 dB
S21 2 : -4 . 6280 dB 1. 850 000 000 GHz

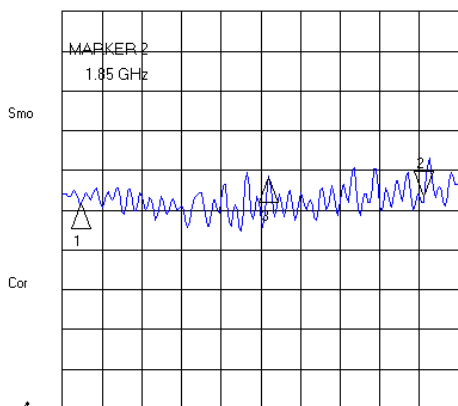

CH2 Markers
1 : -4 . 7060 dB
380 . 000 MHz
3 : -4 . 3840 dB
1. 18513 GHz

START 300 . 000 MHz STOP 2000 . 000 MHz

CH4 SWR 100 m / REF 1
S22 2 : 5. 1173 1. 850 000 000 GHz

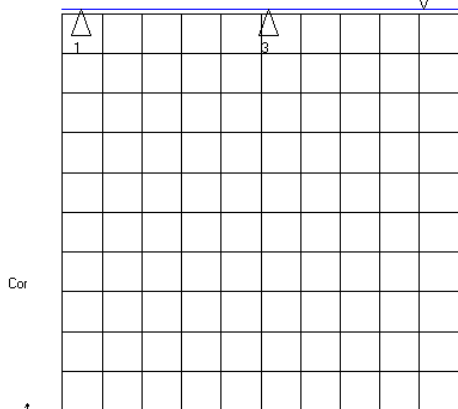

CH4 Markers
1 : 5. 1792
380 . 000 MHz
3 : 4. 9917
1. 18513 GHz

START 300 . 000 MHz STOP 2000 . 000 MHz