

Part No: RAXXA2-N-8


**N Attenuators • Male to Female • DC - 8 GHz - 2 W**

## 电气特性 ELECTRICAL

- **Frequency Range** DC - 8 GHz
- **Attenuation (dB)**
  - 1 through 9  $\pm 0.5$  dB
  - 10 .....  $\pm 0.4$  dB
  - 20 .....  $\pm 0.4$  dB
  - 30 .....  $\pm 0.5$  dB
  - 40 .....  $\pm 0.6$  dB
  - 50 .....  $\pm 0.6$  dB
- **VSWR (MAX)**
  - DC – 4 GHz..... 1.20 : 1
  - 4-8 GHz.....1.30 : 1
- **Impedance** 50 Ohms
- **RF Power Nominal** 2 Watts Average at 25°C  
PEAK: 500 Watts  
(5  $\mu$ Sec Pulse Width , 0.5% Duty Cycle)

## 机械特性 MECHANICAL

- **Temperature Range** -55°C - +125°C
- **Connectors** Brass , Nickel Plated
- **Connector Pins** Beryllium Copper, Gold Plated
- **Body** Aluminum
- **Insulators** PTFE, Virgin Electrical Grade

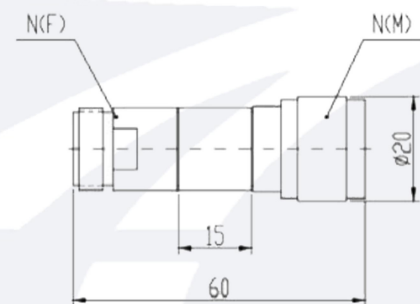

**Connector: N and TNC are optional.**

Unit : mm

## 订货信息 ORDER

Model Number : RAXXA2-N-8  
└──────────┘ dB Value