

Part No: RAXXA100-S-6


SMA Attenuators • Male to Female • DC – 6 GHz - 100 W

电气特性 ELECTRICAL

- **Frequency Range** DC – 6 GHz
- **Attenuation (dB)**
 - 3± 0.80 dB
 - 6± 0.80 Db
 - 10 ± 0.75 dB
 - 20 ± 0.75 dB
 - 30 ± 0.75 dB
 - 40 ± 0.75 dB
- **VSWR (MAX)** DC – 6 GHz..... 1.30 : 1
- **Impedance** 50 Ohms
- **RF Power Nominal** 100 Watts Average at 25°C
PEAK: 5000 Watts
(5 μSec Pulse Width , 2% Duty Cycle)

机械特性 MECHANICAL

- **Temperature Range** -55°C - +125°C
- **Connectors** Brass ,Nickel Plated
- **Connector Pins** Beryllium Copper, Gold Plated
- **Body** Black, Finned Aluminum
- **Insulators** PTFE, Virgin Electrical Grade

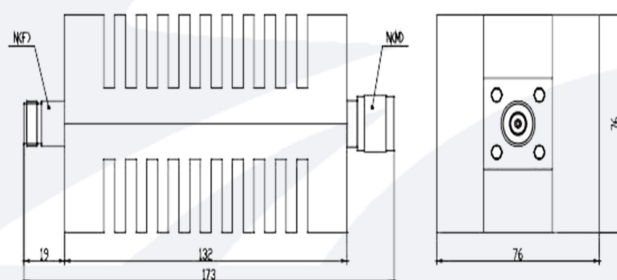

Connector: SMA and N are optional.

Unit:mm

订货信息 ORDER

Model Number : RAXXA100-S-6
└──────────┘ dB Value