

Coaxial Bandpass Filter

11-15 GHz/SMA Female

Model: TLBF-11G-15G-E-Cryo

TLBF-11G-15G-E-Cryo is a coaxial bandpass filter with a passband frequency from 11 to 15 GHz . The nominal insertion loss of the filter is 1.0 dB and the typical rejection is 60 dB.

Features:

- Passband Frequency Range:11-15 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts
- Field Replaceable RF Connectors

Applications:

- Instrumentations
- Radar Systems
- System Integrations


电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	11		15	GHz
宽带 Band Width			4000	MHz
通带插损 Passband Insertion Loss			1.0	dB
带内波动 Pass Band Ripple	0.8			dB
带外抑制 Rejection	>60dB@DC-9.0Ghz 17Ghz			dB
耐受功率 Power Handling			15	W
输入驻波 Input VSWR			1.4	:1
阻抗 Impedance	50			Ohms

环境和机械特性 Envirionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
接口 Connectors	SMA Female	
尺寸 Size	45*18*10	mm

外形图 Outline Drawing: Unit:mm

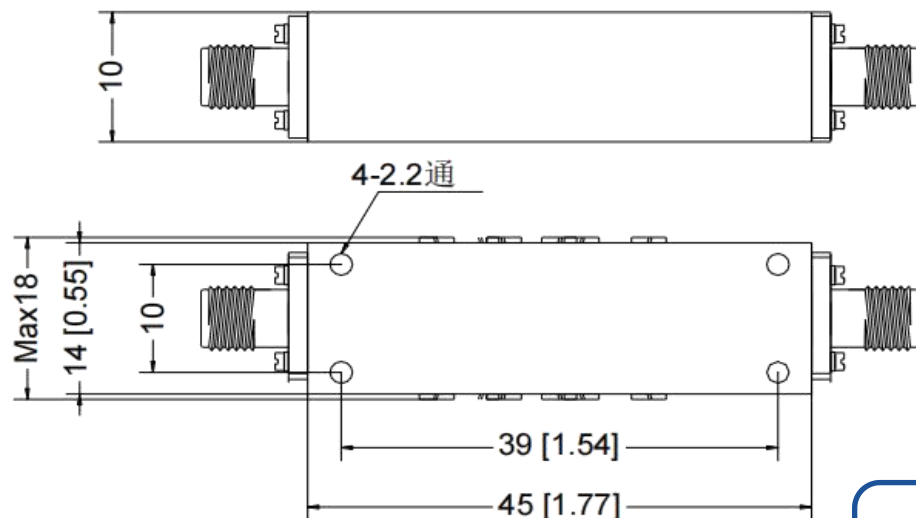

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-11G-15G-E-Cryo	Coaxial Bandpass Filter, Passband frequency range :11-15GHz, Passband Insertion Loss:1.0dB, SMA Female	Rev.1.0